

# Hole Plugs



## Hole Plugs

### Foam Block

The dimensions listed here (150 x 150 x 140mm) is the most common size used to fill drill holes. Should a custom size be required, please get in touch with our sales team and confirm your dimensions in millimetres (L x W x H).


SKU	SIZE	UOM
1136-00012	150mm x 150mm x 140mm	Pack of 48



### PVC End Cap - DWV

DWV solvent cement joint cap.

SKU	NOMINAL BORE	A (mm)	B (mm)
1904-00005-050	50mm	56	24
1904-00005-065	65mm	69	19
1904-00005-080	80mm	83	25
1904-00005-100	100mm	110	28
1904-00005-150	150mm	160	39
1904-00005-225	225mm	250	76
1904-00005-300	300mm	315	76

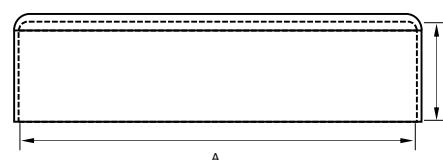

### Plastic Hole Plug

There are a number of various RC & RAB Hole Plugs on the market today, we stock them all.

	SKU	TYPE	TOP	LENGTH	BASE
A	1136-00015	RAB Plug	118mm	110mm	85mm
B	1136-00050	RC Plug	170mm	200mm	90mm
C	1136-00051	RC Lid	170mm	---	---
D	1136-00013	RC Plug	170mm	200mm	85mm
E	1136-00014	RC Lid	170mm	---	---



### Concrete Hole Plug

Westernex manufactures their own concrete hole plugs, these are available ex stock for RAB or RC holes.

SKU	DESCRIPTION	SIZE
1136-00001	RAB - Poly, Wire, Ally Tag, Perma Tag	WC2 - 120mm Top x 70mm Base x 180mm Height
1136-00002	RAB - Wire, Ally Tag, Perma Tag	WC2 - 120mm Top x 40mm Base x 265mm Height
1136-00003	RC - Poly, Wire, Ally Tag, Perma Tag	WC4 - 170mm Top x 115mm Base x 190mm Height
1136-00004	RC - Wire, Ally Tag, Perma Tag	WC4 - 170mm Top x 120mm Base x 180mm Height





Hole Plugs

Blast Hole Saver

These hole savers are used to prevent loose dirt and small animals (or any other foreign matter) from falling back into the hole. They also assist in loading holes and act as a visual warning for drilled holes. They are blow moulded from polypropylene.

SKU	COLOUR	SIZE
1136-00300	Orange	Bottom Diameter: 60mm Top Diameter: 195mm Height: 400mm
1136-00301	Red	Bottom Diameter: 75mm Top Diameter: 190mm Height: 410mm
1136-00302	Yellow	Bottom Diameter: 160mm Top Diameter: 330mm Height: 800mm
1136-00303	Black	Bottom Diameter: 200mm Top Diameter: 450mm Height: 800mm


*\*These are available in any colour however, the colours in the table are there to distinguish the different sizes of hole saver.*



Octoplug

Octoplug has been used for decades to seal your drill hole, made of UV-stabilised plastic.

- Install the octoplug to a depth of 0.3m below ground level, to prevent surface fill from settling into hole below this level.
- Alternately completely backfill drillhole with cuttings to the surface allowing for settlement.
- Tag the drillhole for future identification Place topsoil over the drillhole to encourage growth of natural vegetation.
- Complete to a height of 0.2m above surface to compensate for settlement.

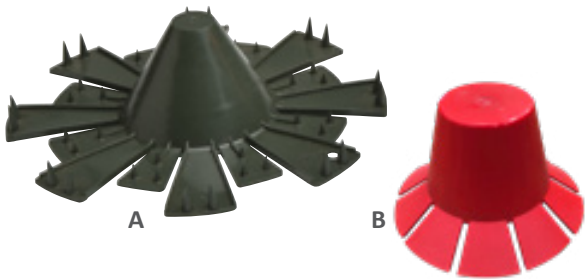

	SKU	SIZE
A	1136-00011	100mm (4")
B	1502-00073	75mm (3")





***Perth Main Warehouse***

66 Truganina Rd, Malaga,  
Western Australia 6090  
+61 (0) 8 9209 8500  
[perth@westernex.com.au](mailto:perth@westernex.com.au)

***Kalgoorlie Warehouse***

18 Kinclaven Way, Broadwood,  
Kalgoorlie, Western Australia 6430  
+61 (0) 8 9091 1152  
[kalgoorlie@westernex.com.au](mailto:kalgoorlie@westernex.com.au)

***Brisbane Warehouse***

14 Hasp St, Seventeen Mile Rocks,  
Queensland 4073  
+61 (0) 7 3376 2422  
[brisbane@westernex.com.au](mailto:brisbane@westernex.com.au)

***Mt Isa Warehouse***

13 Ryan Rd, (Entry off Davis Rd)  
Mt Isa, Queensland 4825  
+61 (0) 7 4743 2122  
[mtisa@westernex.com.au](mailto:mtisa@westernex.com.au)

***Orange Warehouse***

72 Astill Drive, Orange,  
NSW, 2800  
+61 (0) 7 3376 2422  
[brisbane@westernex.com.au](mailto:brisbane@westernex.com.au)

